


SEDIMENT FILTER CHANGE INSTRUCTIONS

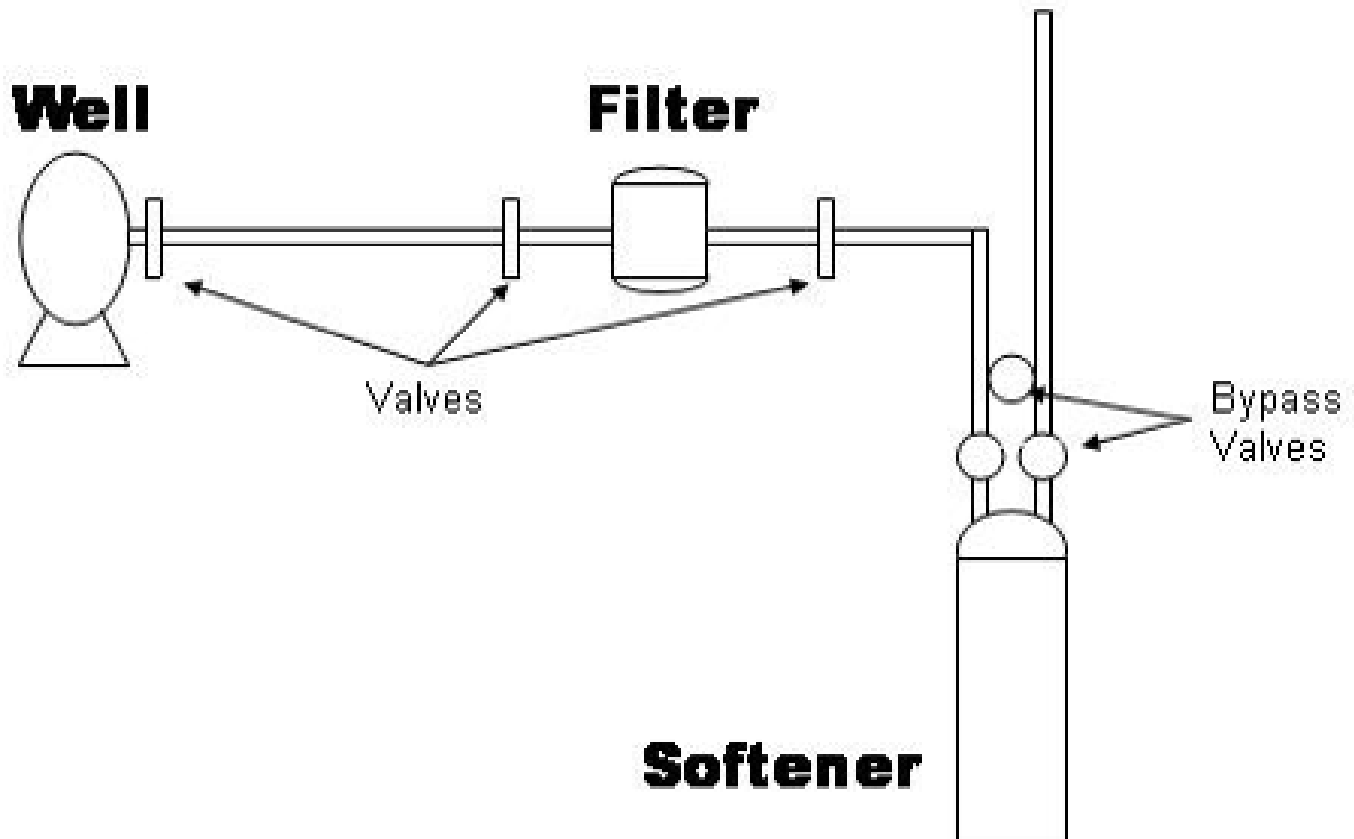

1. Shut off the water by either turning off the valves before and after the sediment filter or turning off the valve at the well tank. Turn off the valve before the sediment filter first and then run a cold water faucet until the water stops or trickles out

2. Using a filter wrench or a pair of large pliers, unscrew the filter housing and take old filter out

2.NOTICE: Water will sometimes still drain

3. Put ½ teaspoon household bleach in filter housing

4. Check to make sure O-Ring did not fall out and has enough silicone on it

5. Put new pre-filter in housing and screw back on

6. Wipe down filter housing with rag so it is dry; if there is a leak it can be caught

7. Turn water back on slowly

8. Shut water off at faucet or until air is out of the line

9. Check for leaks (wait about 5 minutes after water is turned back on)

10.NOTICE: Faucets in house may have air in lines, run water through faucets until air is gone.

Huemann
WATER CONDITIONING

3607 Chapel Hill Road
McHenry, IL 60050

(815) 385-3093